

UNITRENDS' RECOVERY-813 RACK APPLIANCE



Backup, Archiving &
Disaster Recovery


Focus on your business, not your backup

- Family of scalable, all-in-one backup, archiving and disaster recovery appliances
- No Limits™ licensing
- Enterprise-level heterogeneous backup
- Byte-level Adaptive Deduplication™
- Integrated dissimilar bare metal recovery for physical and virtual servers
- Physical and virtual versions of appliances
- Intuitive, federated, web-based user interface
- Cloud-based disaster recovery
- Instant Recovery With Failover Virtualization
- High-performance rotational archiving

The Unitrends' Recovery- and vRecovery-series of physical and virtual backup, archiving and disaster recovery appliances provide next-generation data protection designed from the ground-up as a simple, all-in-one solution for small and medium businesses. Unitrends' appliances enable businesses to focus on their business rather than on their backup through technology that is so sophisticated, it makes data protection simple.

The Recovery-813 is perfect for small- to medium-sized businesses. This 1U form factor unit supports byte-level deduplication with an unformatted usable physical storage capacity of 9TB (metadata and data). It is organized in a RAID-5 configuration with cold-swap user-replaceable drives.

The following is a representation of how Unitrends' Recovery- and vRecovery-series appliances work:

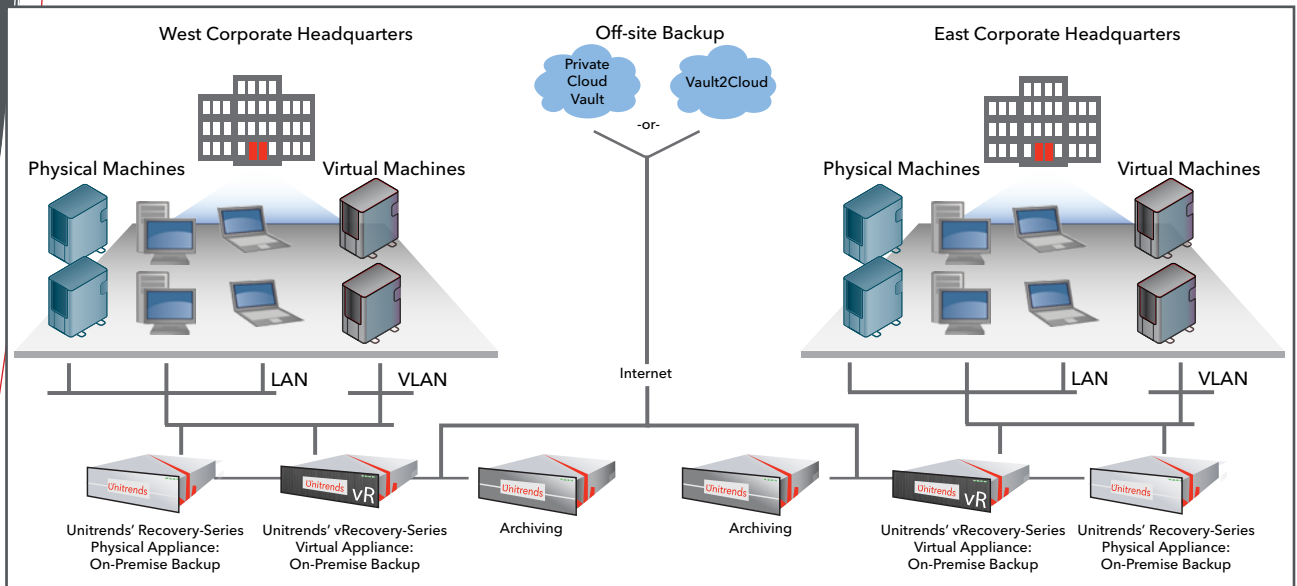

PLATFORM CHARACTERISTICS SUMMARY¹

● Standard

○ Optional

∅ Not Available

| Unitrends' Family of Backup Appliances | | | | | | | | | | | |
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------------|
| Major Features | 172 | 212 | 312 | 612 | 712 | 713 | 813 | 822 | 823 | 833 | vRecovery |
| No Limits™ Licensing | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Protects 100+ Versions of Operating Systems and Applications | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Continuous Data Protection | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Point-in-Time Protection | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Adaptive Deduplication™ | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Vault2Cloud™ Enabled | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Private Vaulting Enabled | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| iseGrid Scalable | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Instant Recovery (Windows) | ∅ | ∅ | ∅ | ● | ● | ● | ● | ● | ● | ● | ∅ |
| Instant Recovery (VMware) | ∅ | ∅ | ∅ | ● | ● | ● | ● | ● | ● | ● | ● |
| May Serve as Private Vault | ∅ | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| May Cross Vault | ∅ | ∅ | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Rapid Recovery Console | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Hot/Cold Bare Metal | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Dissimilar Bare Metal | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| AES-256 Bit Encryption | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Capacities | 172 | 212 | 312 | 612 | 712 | 713 | 813 | 822 | 823 | 833 | vRecovery |
| Raw Storage (TB) ² | 1 | 1 | 2 | 2 | 4 | 6 | 9 | 13 | 19 | 31 | 1 - unlimited |
| Maximum Backup (TB) ³ | 0.4 | 0.5 | 1 | 1.2 | 2.4 | 3.2 | 6 | 9 | 13 | 20 | 0.6 - unlimited |
| Vaulting Capacity (TB) | ∅ | 0.4 | 0.9 | 0.9 | 1.9 | 2.7 | 4.5 | 6 | 9 | 14 | 0.5 - unlimited |
| Rotational Archiving | 172 | 212 | 312 | 612 | 712 | 713 | 813 | 822 | 823 | 833 | vRecovery |
| Recovery-Dock (USB 2.0) | ○ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ |
| Recovery-Dock (eSATA) | ∅ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ∅ |
| Recovery-Archive (eSATA) | ∅ | ∅ | ∅ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ∅ |
| To Tape (using optional LVD SCSI/SAS adapter) | ∅ | ∅ | ∅ | ∅ | ∅ | ○ | ○ | ○ | ○ | ○ | ∅ |
| To NAS | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| To SAN | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Standard eSATA Ports | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | ∅ |
| Optional eSATA Ports | 0 | 0 | 0 | 0 | 4 | 4 | 4 | 4 | 4 | 4 | ∅ |
| Networking | 172 | 212 | 312 | 612 | 712 | 713 | 813 | 822 | 823 | 833 | vRecovery |
| Standard 1Gb Ethernet Ports | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 2 | 4 | ∅ |
| Optional 4x1Gb Ethernet Ports | 0 | 0 | 0 | 0 | 0 | 4 | 4 | 4 | 4 | 4 | ∅ |
| Total Possible 1Gb Ethernet Ports | 1 | 1 | 1 | 2 | 2 | 6 | 6 | 6 | 6 | 8 | ∅ |
| 2x10Gb Ethernet | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ○ | ○ | ○ | ∅ |
| 1x8Gb Fibre Channel | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ○ | ○ | ○ | ∅ |

¹ Please see our [Detailed Appliance Comparison Matrix](#) for additional appliance information.

² Additional virtual processors and memory will be required as storage is added to vRecovery virtual appliances.

³ Maximum backup is the best-case, maximum total backup size with the absolute minimum retention. It assumes a compression ratio of at least 2:1. Please use the [Unitrends Appliance Navigator](#) or the [Unitrends Virtual Appliance Navigator](#) for a more reliable value.